FEATURES

- Powermate OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Fuel gauge allows user to track gasoline levels
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



PERFORMANCE		
Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	3500
Rated Power	Watts	3200



Engine		
Brand		Powermate
Type		OHV
Operating Speed Nominal	rpm	3000
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	0.6
Low Oil Shutdown		√



Alternator	
Voltage regulation system	AVR

Dimensional data		
Length	(L) mm	644
Width	(W) mm	545
Height	(H) mm	534
Dry weight	kg	53
Carton box dimension LxWxH	mm	620x452x495



Autonomy		
Fuel tank capacity		15
Fuel consumption 50%	l/h	1.8
Running time 50%	h	8



GENSET CONTROL PANELS

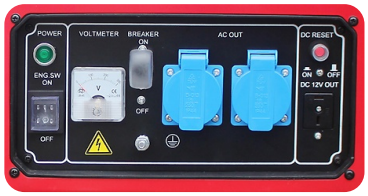

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS:
- Start selector switch OFF - ON
- Recoil start

INSTRUMENTATION
- Voltmeter
- Fuel Level

PROTECTIONS:
- Thermal Circuit Breaker
- Oil Guard

SOCKET TYPE

SCHUKO 230V 16A IP44	2

The information is aligned with the Data file at the time of download. Printed on 25/11/2026 (ID 12770)

©2024 | PR Industrial S.r.L unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice